

stored energy solutions for a demanding world



Model: 48NPFC10

NPFC Series

Narada NPFC series is a complete range of 48V LiFePO₄ (Lithium Iron Phosphate) battery products, for a wide variety of applications, such as telecom base station, UPS, renewable energy system, etc., with advanced life, standard size, light weight and strong environmental adaptability.




Battery Management System(BMS)

For standard Narada lithium battery module, BMS is applied to monitor voltage, current, temperature of cells and module, take protections against over-charge, over-discharge, over-current, over-temperature, under-temperature and short circuit, etc., and provide cell balancing and current limitation during charging process to ensure a reliable safety and excellent performance.

Meantime, Narada supply customized upper computer software for BMS communication via RS232 or RS485 to set parameters or read monitoring data.

Dimensions-mm

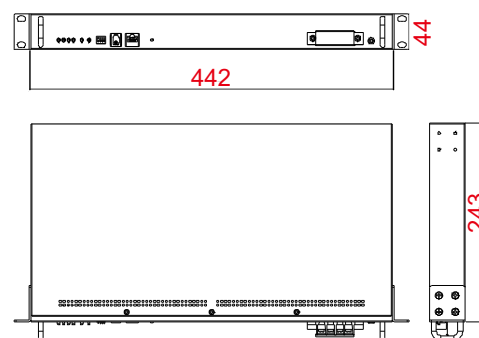

Specifications

Battery Specification		
Rated Voltage		48V
Rated Capacity		10Ah (C ₅ , 0.2C to 40.5V at 25 °C)
Discharge Current (Max.)		10A
Discharge End Voltage		40.5V
Charge Current (Recomm.)		2A
Charge Current (Max.)		10A
Charge Voltage		54±0.5V
Dimensions	Width	442mm
	Depth	243mm
	Height	44mm (1U)
Typical Weight		7.3kg
Layout of Front Panel		
Status Indicators		SOC / ALM / RUN
Communication Ports		RS232 / RS485
Communication in Parallel		8 modules in maximum
Reset Key		Available
Terminal Size		M4 / 10mm (Screw size / Cable Width)
LCD Screen		Not Available
Breaker		Not Available
Dry contact		Not Available
Operation Environments		
Temperature Range	Discharge	-20 to +60 °C
	Charge	0 to +60 °C
	Storage	0 to +40 °C
Temperature Recommendation	Discharge	+15 to +35 °C
	Charge	+15 to +35 °C
	Storage	+15 to +30 °C
Humidity		5% to 95%

Model: 48NPFC10

NPFC Series

Constant Current Discharge Characteristics (25°C,77°F)

End voltage	Current(A) Time	Hours									1C Min
		0.1C	0.15C	0.2C	0.25C	0.3C	0.4C	0.5C	0.6C	0.8C	
46.5V		9.61	6.36	4.74	3.80	3.14	2.21	1.68	1.31	1.02	41.3
45.0V		9.79	6.49	4.85	3.89	3.23	2.39	1.88	1.53	1.17	52.6
43.5V		9.91	6.59	4.93	3.98	3.27	2.45	1.94	1.60	1.21	55.7
42.0V		10.00	6.65	4.97	3.97	3.30	2.48	1.97	1.63	1.23	57.0
40.5V		10.05	6.69	5.00	4.00	3.33	2.50	1.99	1.65	1.24	57.9
39.0V		10.07	6.71	5.02	4.02	3.34	2.50	2.00	1.66	1.24	58.3

Discharge Data with Constant Power (25°C,77°F)

End voltage	Power Time	Hours								540W Min
		45W	90W	135W	180W	225W	270W	315W	360W	
46.5V		10.89	5.34	3.50	2.55	1.96	1.57	1.29	1.07	--
45.0V		11.09	5.45	3.59	2.65	2.07	1.70	1.44	1.24	30.0
43.5V		11.22	5.52	3.63	2.68	2.12	1.73	1.47	1.27	33.1
42.0V		11.30	5.56	3.66	2.71	2.13	1.76	1.49	1.30	43.2
40.5V		11.35	5.59	3.68	2.73	2.15	1.78	1.50	1.30	46.5
39.0V		11.38	5.60	3.69	2.74	2.16	1.79	1.51	1.32	47.9

Performance Curves

